


CAT6A FTP CABLE/ 23AWG/ 4x2x0.57mm/ COPPER CLAD ALUMINUM/ PVC


Features:

- Complies with Category 6 UL444, ANSI/TIA/EIA 568B & ISO/IEC 11801 Standard
- Supports transmission of digital and analogue voice, data and video signal.
- Rated Temperature: -20° to +75°
- Adopts shielding Aluminum Foil, able to reach a very good shielding effect.

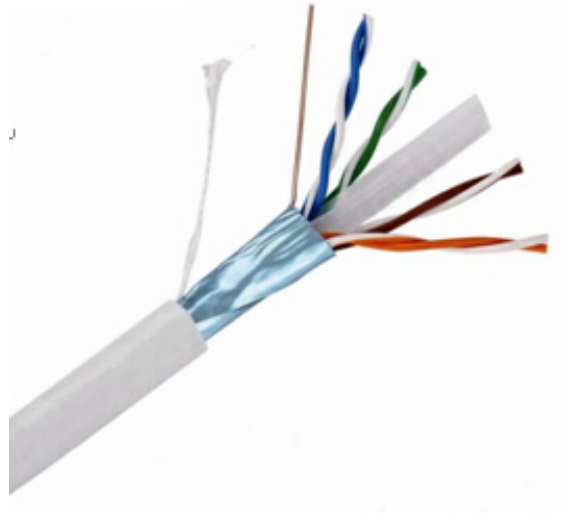

Application:

- 1000 Base T (IEEE 802.3)
- Fast Ethernet (IEEE 802.3u)
- 100vg-AnyLAN (IEEE 802.12)
- Token Ring (IEEE 802.5)
- TP-PMD (ANSI X3T9.5) TR-4, TR-16 Active, TR-16 Passive
- 1000 Mbps CDDI
- ATM 1000 Mbps

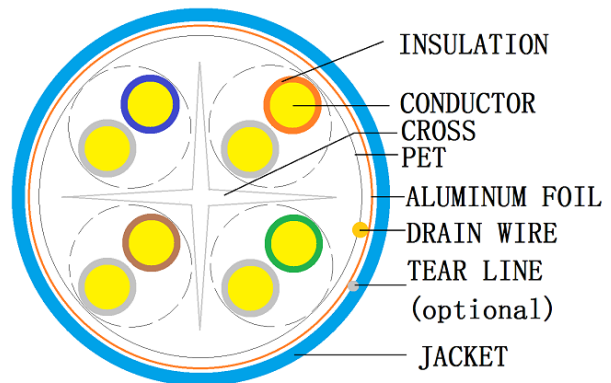

Performance:

ELECTRICAL CHARACTERISTICS(20°C)

PROPAGATION DELAY @ 100MHZ ≥ 537.6 ns/100M

PROPAGATION DELAY SKEW:MAX. ≥ 45 ns/100M

DIELECTRIC STRENGTH AC-500V/1 MIN NO BREAKDOWN

D-C RESISTANCE UNBALANCE:MAX2%

Cable Construction:

Inner conductor	Material	Copper Clad Sliver
	Diameter	0.58 ± 0.01mm (23AWG)
Insulation(Dielectric)	Material	Color-coded PE (Polyethylene)
	Average Thickness	0.22mm
	Diameter	1.03 ± 0.01mm
Cross Separator	Material	Plastic
Shielded Layer	Material	Aluminum Foil+PET
Outer Jacket	Material	New PVC (rip cord)
	Thickness	≥ 0.6mm
	Nominal O.D	6.40mm ± 0.20mm
	Color	GREY
Twisted pair	N/A	Pair 1 : Blue, White / Blue Pair 2 : Orange, White / Orange Pair 3 : Green, White / Green Pair 4 : Brown, White / Brown

Printing words:

LINK TECH CAT 6A FTP 23AWG/4P NETWORK CABLE VERIFIED TO TIA/EIA 568B 001-305M

Packing:

- 1000ft/ 305m per pull drum, 2drums/carton
- Custom label on drum surface